



中山市横栏镇新莱德照明电器厂
ZHONGSHAN NEWLED LIGHTING CO., LTD

地址: 广东省中山市横栏镇三沙工业區賢興一路50號

Add: Sansha Industrial Zone, Henglan Town, Zhongshan
City, Guangdong, China 528478


Tel: +86-760-8791 1001 Fax: +86-760-8791 1005

E-mail: julian@zsnewled.com


Web: www.zsnewled.com

FINE JEWELLERY LIGHTING

ZHONGSHAN NEWLED LIGHTING CO.,LTD

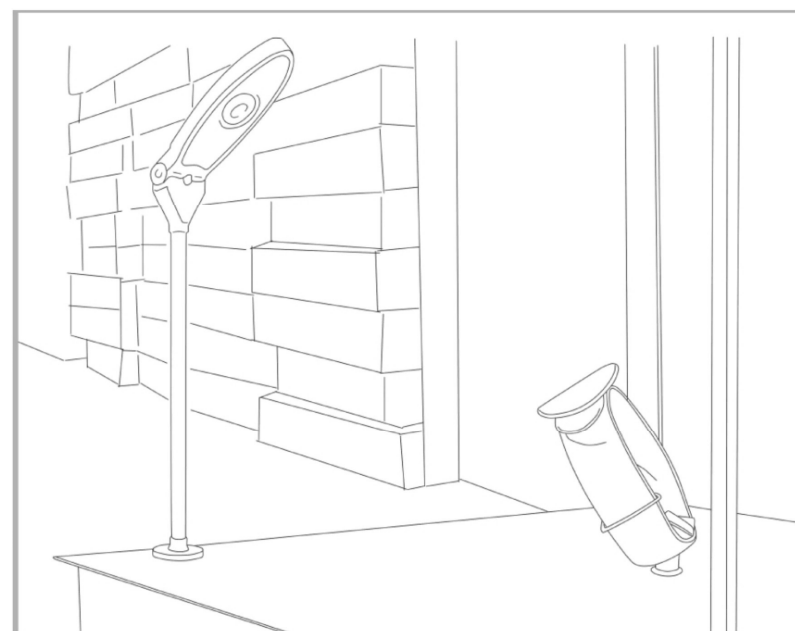


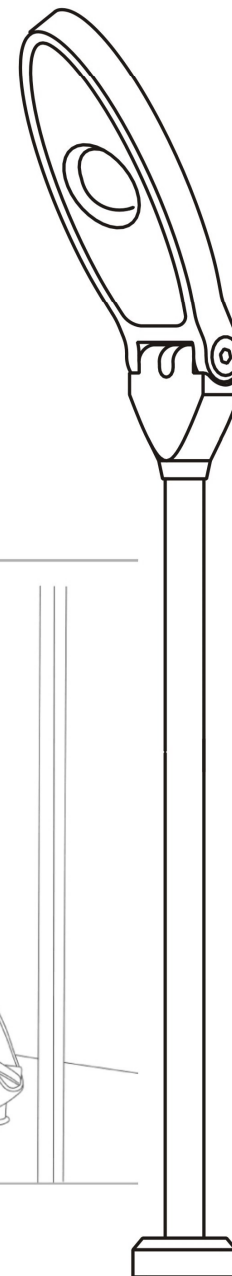


www.zsnewled.com



LED DISPLAY CABINET LIGHT

NL-8-02 A/B



LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.



ZSNEWLED
Lighting

NL-8-03 A/B



LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED DISPLAY CABINET LIGHT

NL-8-04



LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/ current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

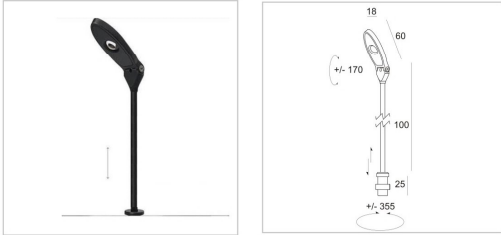

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




ZSNEWLED Lighting

NL-8-05 A/B



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/ current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

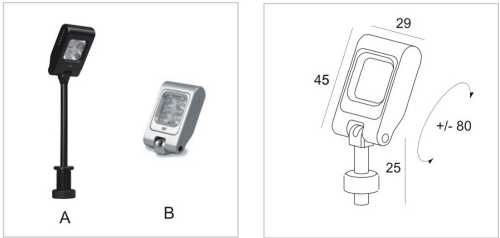

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED DISPLAY CABINET LIGHT

NL-8-06



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/ current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:
adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




ZSNEWLED
Lighting

NL-8-07



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	9W
LuminousFlux	900lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/ current	20V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:
adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED DISPLAY CABINET LIGHT

NL-8-08 A/B



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	6V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

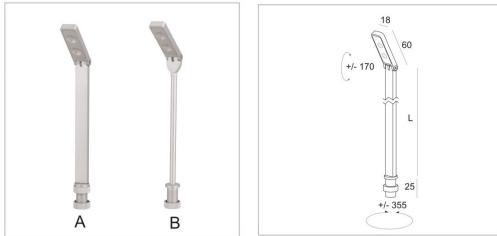

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




ZSNEWLED Lighting

NL-8-09 A/B/C



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

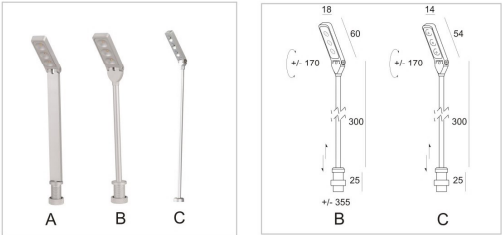

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED DISPLAY CABINET LIGHT

NL-8-10



LightSource	Epistar LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

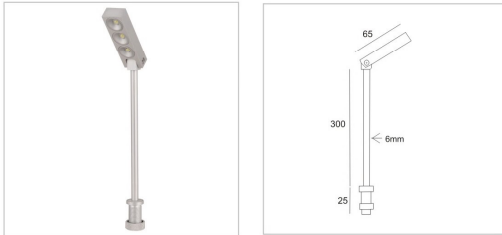

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.



ZSNEWLED
Lighting

NL-8-11



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	6-60
Voltage/current	3V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED DISPLAY CABINET LIGHT

NL-8-12 A/B



LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

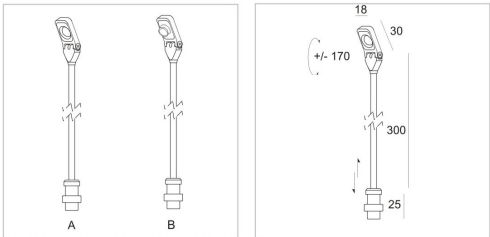

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




ZSNEWLED
Lighting

NL-7-01



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	6-60
Voltage/current	5V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

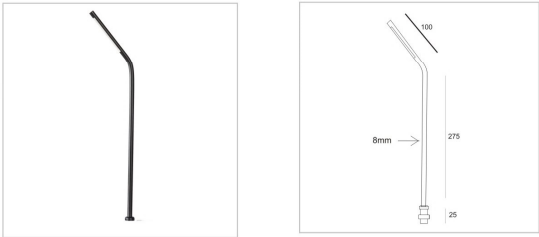

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED DISPLAY CABINET LIGHT

NL-7-02




LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	9W
LuminousFlux	900lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/ current	30V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

NL-7-04

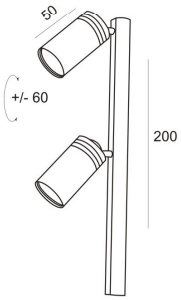


LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	6W
LuminousFlux	600lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/ current	20V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



NL-7-03




LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	6W
LuminousFlux	600lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/ current	20V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

NL-7-05

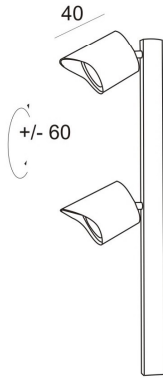


LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	6W
LuminousFlux	600lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/ current	20V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



LED DISPLAY CABINET LIGHT

NL-2-02

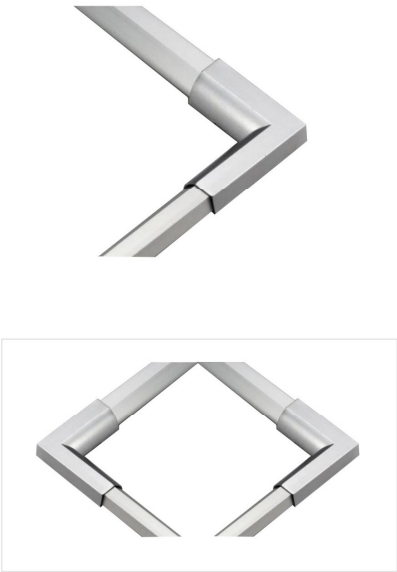

LightSource	Osram LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	N/A
PowerConsumption	18W
LuminousFlux	1800lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	24V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

NL-2-04



LightSource	Osram LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø8 mm
PowerConsumption	48W
LuminousFlux	4800lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	24V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	




ZSNEWLED
Lighting

NL-2-03




LightSource	Osram LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	N/A
PowerConsumption	6W
LuminousFlux	600lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	24V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

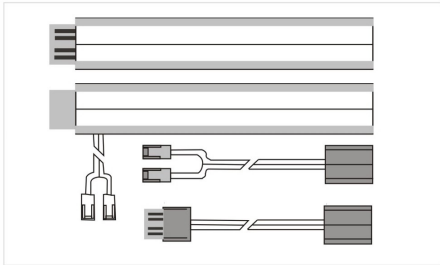

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

NL-9-02

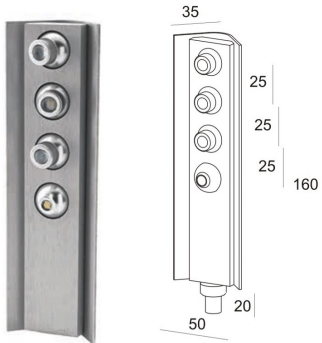

LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	




LED DISPLAY CABINET LIGHT

NL-1-02



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø55mm
PowerConsumption	3W
LuminousFlux	350lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

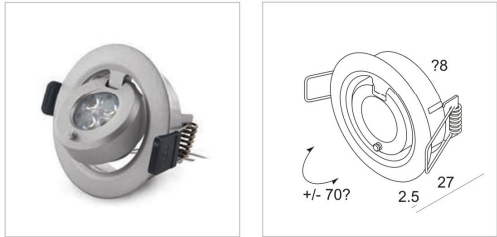

Application:
adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




ZSNEWLED
Lighting

NL-1-03A/B



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

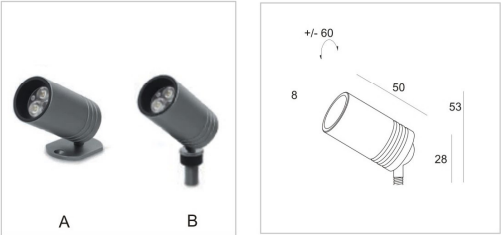

Application:
adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED DISPLAY CABINET LIGHT

NL-1-04-1A/B



LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	N/A
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50,000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

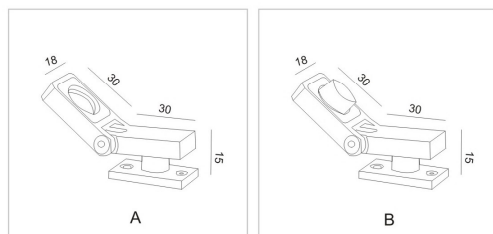


Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

NL-1-05



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø25mm
PowerConsumption	1.5W
LuminousFlux	100lm
Lifetime	50,000hours
IP-code	IP20
Beam Angle	45
Voltage/current	3V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	




ZSNEWLED Lighting

NL-1-04-2A/B




LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø6mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50,000hours
IP-code	IP20
Beam Angle	45
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

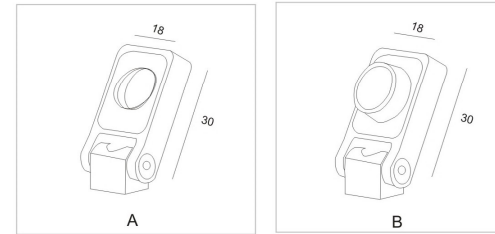


Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

NL-1-06

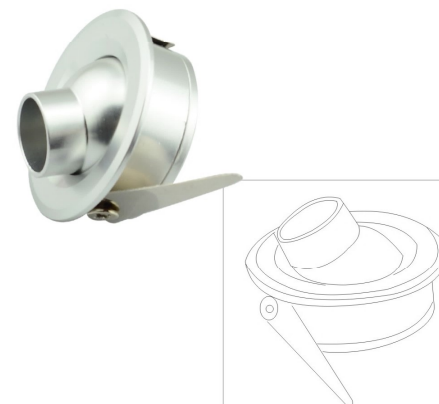

LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø30mm
PowerConsumption	2W
LuminousFlux	200lm
Lifetime	50,000hours
IP-code	IP20
Beam Angle	45
Voltage/current	3V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



LED DISPLAY CABINET LIGHT

NL-1-11



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	3W
LuminousFlux	300 lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

NL-1-13



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	2W
LuminousFlux	200 lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	6-60
Voltage/current	3V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



ZSNEWLED
Lighting

NL-1-12



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	2W
LuminousFlux	200lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	3V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

NL-1-14



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø30mm
PowerConsumption	2W
LuminousFlux	200lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	6-60
Voltage/current	3V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



LED DISPLAY CABINET LIGHT

NL-1-15



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø6 mm
PowerConsumption	9W
LuminousFlux	900lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	20V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




ZSNEWLED
Lighting

NL-1-16A/B



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø6 mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
code	IP20
Beam Angle	45
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

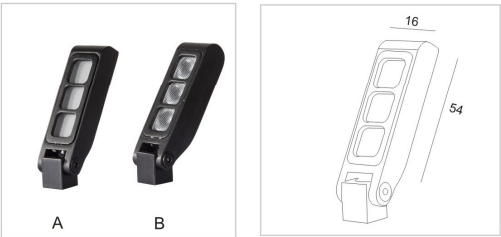

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED HOTEL WALL LIGHT

NL-6-01



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	145*45*45 mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	30
Voltage/current	3V DC
Output Current	700mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:
adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




ZSNEWLED
Lighting

NL-6-02



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	145*45*45 mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
code	IP20
Beam Angle	30
Voltage/current	3V DC
Output Current	700mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:
adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED HOTEL WALL LIGHT

NL-6-03



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	N/A
PowerConsumption	3W
LuminousFlux	300 lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	30
Voltage/current	3V DC
Output Current	700mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	




Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

NL-6-04




LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	N/A
PowerConsumption	3W
LuminousFlux	300 lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	30
Voltage/current	3V DC
Output Current	700mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



NL-6-05



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	N/A
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	30
Voltage/current	3V DC
Output Current	700mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

NL-6-06



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	N/A
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	30
Voltage/current	3V DC
Output Current	700mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

